




**FICHE TECHNIQUE**  
**COUDE 45° MALE x FEMELLE BSP**

**Température de service : -20°C / +100°C**  
**Acier EZ**

Désignation	Filetage	
	A BSP	B BSP
<b>C.MBSP1/4-TBSP1/4 45</b>	1/4	1/4
<b>C.MBSP3/8-TBSP 3/8 45</b>	3/8	3/8
<b>C.MBSP1/2-TBSP1/2 45</b>	1/2	1/2
<b>C.MBSP3/4-TBSP 3/4 45</b>	3/4	3/4
<b>C.MBSP1"-TBSP1" 45</b>	1	1
<b>C.MBSP1"1/4-TBSP1"1/4 45</b>	1"1/4	1"1/4
<b>C.MBSP1"1/2-TBSP1"1/2 45</b>	1"1/2	1"1/2
<b>C.MBSP2"-TBSP2" 45</b>	2	2

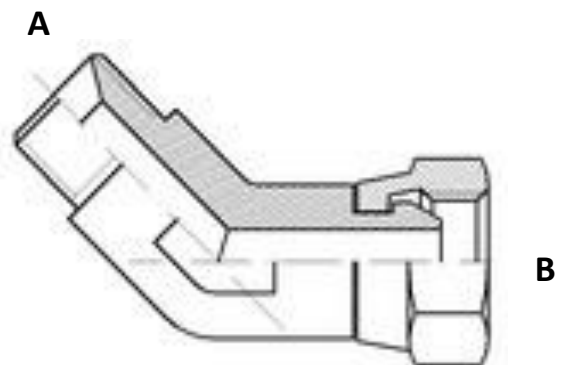

Diffusion Spécialisée de Flexibles  
444, Rue des Jonchères Bât. 16  
69730 GENAY

Tél. : 04.37.40.84.17/ Fax : 04.37.40.84.16/ Mail : contact@dsf-lyon.fr