




FICHE TECHNIQUE

UNION MALE JIC x MALE NPT

Température de service : -20°C / +100°C
Acier EZ

Désignation	Filetage	
	A JIC	B NPT
A.MJ 7/16 - MB 1/8	7/16	1/8
A.MJ 7/16 - MB 1/4	7/16	1/4
A.MJ 1/2 - MB 1/8	1/2	1/8
A.MJ 1/2 - MB 1/4	1/2	1/4
A.MJ 9/16 - MB 1/8	9/16	1/8
A.MJ 9/16 - MB 1/4	9/16	1/4
A.MJ 9/16 - MB 3/8	9/16	3/8
A.MJ 3/4 - MB 1/4	3/4	1/4
A.MJ 3/4 - MB 3/8	3/4	3/8
A.MJ 3/4 - MB 1/2	3/4	1/2
A.MJ 7/8 - MB 3/8	7/8	3/8
A.MJ 7/8 - MB 1/2	7/8	1/2
A.MJ 7/8 - MB 3/4	7/8	3/4
A.MJ 1"1/16 - MB 1/2	1"1/16	1/2
A.MJ 1"1/16 - MB 3/4	1"1/16	3/4
A.MJ 1"1/16 - MB 1"	1"1/16	1"
A.MJ 1"5/16 - MB 3/4	1"5/16	3/4
A.MJ 1"5/16 - MB 1"	1"5/16	1"
A.MJ 1"5/16 - MB 1"1/4	1"5/16	1"1/4
A.MJ 1"5/8 - MB 1"	1"5/8	1"
A.MJ 1"5/8 - MB 1"1/4	1"5/8	1"1/4
A.MJ 1"7/8 - MB 1"1/4	1"7/8	1"1/4
A.MJ 1"7/8 - MB 1"1/2	1"7/8	1"1/2

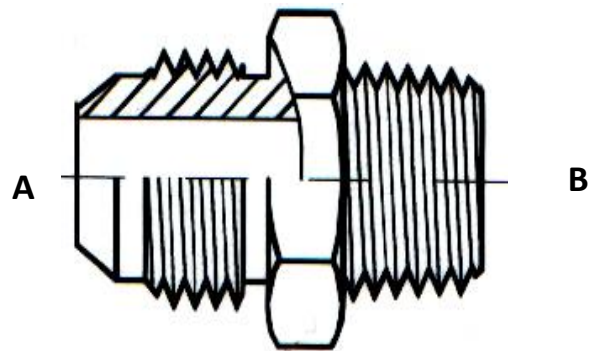

Diffusion Spécialisée de Flexibles
444, Rue des Jonchères Bât. 16
69730 GENAY

Tél. : 04.37.40.84.17/ Fax : 04.37.40.84.16/ Mail : contact@dsf-lyon.fr