




FICHE TECHNIQUE
UNION MALE ORFS x MALE SAE

Température de service : -20°C / +100°C
Acier EZ

Désignation	Filetage	
	A ORFS	B SAE
A.MORFS9/16-MSAE7/16	9/16	7/16
A.MORFS9/16-MSAE9/16	9/16	9/16
A.MORFS11/16-MSAE7/16	11/16	7/16
A.MORFS11/16-MSAE9/16	11/16	9/16
A.MORFS11/16-MSAE3/4	11/16	3/4
A.MORFS13/16-MSAE9/16	13/16	9/16
A.MORFS13/16-MSAE3/4	13/16	3/4
A.MORFS1"-MSAE3/4	1"	3/4
A.MORFS1"-MSAE7/8	1"	7/8
A.MORFS1"-MSAE1"1/16	1"	1/16
A.MORFS1"3/16-MSAE1"1/16	1"3/16	1/16
A.MORFS1"7/16-MSAE1"1/16	1"7/16	1/16
A.MORFS1"7/16-MSAE1"5/16	1"7/16	5/16

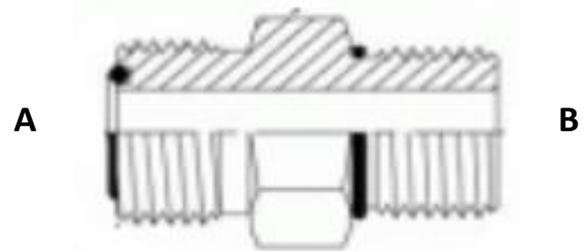

Diffusion Spécialisée de Flexibles
444, Rue des Jonchères Bât. 16
69730 GENAY

Tél. : 04.37.40.84.17/ Fax : 04.37.40.84.16/ Mail : contact@dsf-lyon.fr